

T240



Intuitive Operation



- Remote Service
- Data Logger
- Trend Diagrams
- Battery buffered
- Metering system
- Extensibility



UV-Disinfection system T240 / Touchcontrol 2.0

This UV-system is designed to give reliable **UV disinfection** together with a **solid metering and data logging system**, as well as remote maintenance and many little functions for small to medium water plants. Type approval after ÖNORM M5873-1 and DVGW W270.

ÖVGW-Certificate W1.521, Norwegian NFHI, ISO 9001

Technical data:

Model	VISADES T240
UV lamp count	3
Flow at 97,8% T10	19,11 m ³ /h
Steel quality UV chamber	1.4301
Operation pressure max.	10 bar
UV Chamber diameter	168 mm
UV Chamber width	296 mm
UV Chamber height	1180 mm
Height for Lamp change	2200 mm
Chamber volume	20,1 Liter
Empty weight	31 kg
Flange connections	FL DN80
Water temperature	+1 bis +30 °C
Ambient temperature	+5 bis +40 °C

Controller	T 2.0 VD 240
Power supply	230 V / 50 Hz
Power consumption	250 W
Supply breaker	13 A
Internal breaker	6 A
Protection class	IP54
Dimensions	460 x 600 x 150 mm
Material Cabinet	Stahl pulverbesch.
Weight Cabinet	14,8 kg

Lamp type	ST80
Guaranteed lamp lifetime	9000 h
Lamp power	80 W
UVC-output	28 W




System contains:

- ✓ Stainless steel UV chamber 1.4301
- ✓ High-grade Quartz glass sleeves
- ✓ High-grade UVC low pressure lamps
- ✓ UVC-Sensor selective according to ÖNORM M5873-1
- ✓ High-end electronic ballasts
- ✓ Cabinet: powder coated steel, IP 54
- ✓ 4,3" Color-Touchdisplay, capacitive
- ✓ MicroSD, USB and RS485 ports
- ✓ Connections for sampling valves on the UV-Chamber
- ✓ Connections for Deaeration and draining

Controller Functions:

- ✓ All ÖNORM 5873-1 functions
- ✓ Diverse Counters
- ✓ Many signals on clamps
- ✓ Temperature monitoring for UV-Chamber, Ballasts and Controller
- ✓ Adjustable In- and Outputs (0-10V, 4-20mA, 0-20mA...)
- ✓ Detailed Lamp status
- ✓ Adjustable Logging, up to 1 year
- ✓ Trend – Diagrams on screen
- ✓ Help texts at Alerts
- ✓ Battery buffered Controller
- ✓ Adjustable System Overview

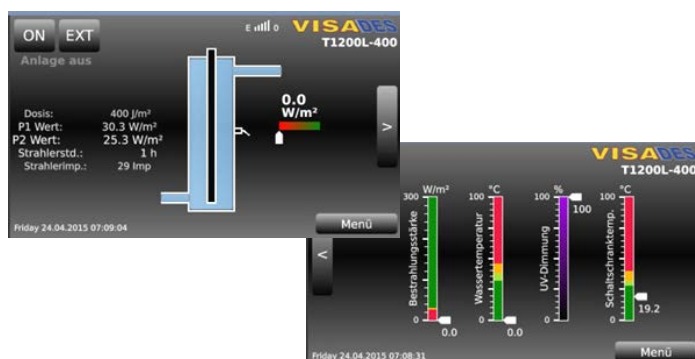

Optional:

- SMS Module
- Modem for Data connection
- ModBus TCP/RTU, Profibus DP
- **FlexFlow:** Autom. Flow regulation
- **Flex Ray:** Autom. Lamp dimming
- **Vario-Operation:** Flow regulation and Lamp dimming combined
- Fill-level monitoring and
- Remote Maintenance, Remote access for Smartphone or Tablet
- Metering and logging for different Probes and Sensors

Further information on www.visades.com

© 2015 VISADES GmbH – Irrtümer und Änderungen vorbehalten

VISADES
UV-TECHNOLOGY

VISADES Technologie & Entwicklung GmbH

A-5023 Salzburg, Mauermannstrasse 2

Tel.: +43-662-871224-17 FAX: DW-10

Email: info@visades.com Internet: www.visades.com